









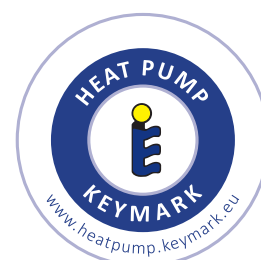


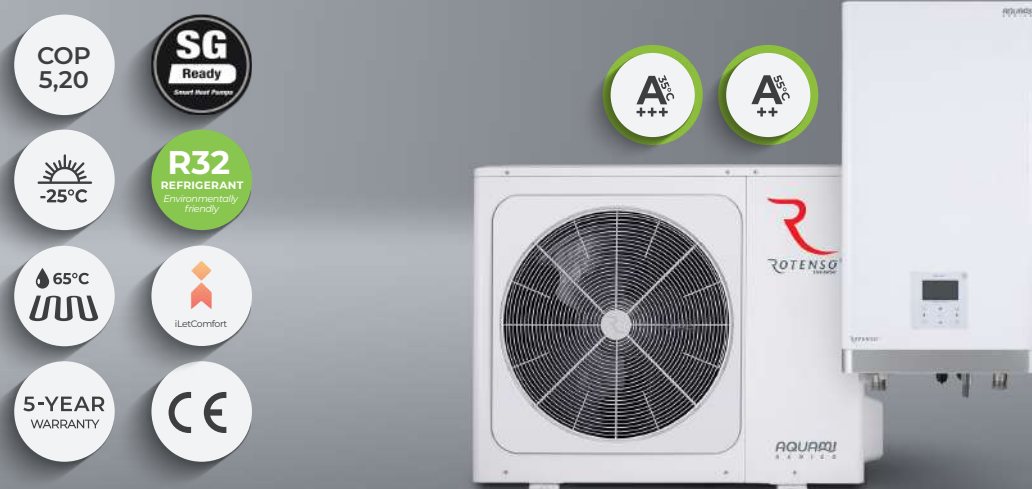
























# Aquami Split heat pump

AQS80X1o<sup>[R14]</sup> / AQS100X13i<sup>[R14]</sup>



## Device features

							
Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 5,20	Operating range down to -25°C	Supply water temperature of 65°C	Integrated USB port for updates
							
Energy meter	Smart Grid functionality	Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance
							
Compact indoor split unit housing	Maximum installation length up to 30m	Silent mode	Built-in Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English
							
Multilanguage menu	Integrated temperature sensor	Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	DHW circulation pump operation schedules	Maximum leaving water temperature of 60°C (in DHW mode)
							
Prepared to create a cascade system	Modbus Protocol						

# Specification indoor unit

Model			AQS100X131 R14	
EAN Code			5905567602122	
Operation modes			Heating and cooling	
Leaving water temperature	Surface cooling	°C	5-25	
	Surface heating	°C	25-65	
	DHW (tank)	°C	30-60	
Power supply		V-Hz, Ø	220-240-50, 1f / 380-420-50, 3f	
Rated input		W	9095	
Operating current		A	13,5	
Sound power level		dB(A)	43	
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f / 380-420-50, 3f	
	Number of heating stages / Power	pcs. / kW	3 / 9 (3+3+3)	
	Maximum running current	A	13,3	
Net dimensions		(W×D×H) mm	420 × 270 × 790	
Gross dimensions		(W×D×H) mm	525 × 360 × 1050	
Net weight / Gross weight		kg	39 / 45	
Water circuit	Water connections		inch	R1" external
	Pressure relief valve		MPa	0,3
	Condensate drain		mm	Ø25
	Expansion tank	Total volume / Actual volume	l	8 / 4,8
		Maximum pressure / Initial pressure	MPa	0,3 / 0,1
	PHE / plate heat exchanger	Type	PHE / plate heat exchanger	
		Minimum flow	l/min	10
	Water pump head		m	9
	Water pump type		DC inverter	
Refrigerant circuit	Liquid / Gas	mm	Ø9,52 / Ø15,9	
Minimal wire pcs and dimension of cords*		pcs × mm²	5 × 2,5	
Control cables: indoor unit to outdoor unit		pcs × mm²	2 × 0.75 (shielded cable)	

# Specification outdoor unit

Model			AQS80X1o R14
EAN Code			5905567602061
Power supply			220-240-50, 1f
Heating (A7/W35)	Capacity	kW	8,30
	Rated input	kW	1,60
	COP		5,20
Heating (A7/W45)	Capacity	kW	8,20
	Rated input	kW	2,08
	COP		3,95
Heating (A7/W55)	Capacity	kW	7,50
	Rated input	kW	2,36
	COP		3,18
Cooling (A35/W18)	Capacity	kW	8,40
	Rated input	kW	1,66
	EER		5,05
Cooling (A35/W7)	Capacity	kW	7,40
	Rated input	kW	2,19
	EER		3,38
Seasonal energy efficiency LWT 35°C	SCOP <sup>(1)</sup>		5,21
	Rated heat output	kW	8,1
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	205,6
	Annual energy consumption	kWh	3218
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A+++
Seasonal energy efficiency LWT 55°C	SCOP <sup>(1)</sup>		3,36
	Rated heat output	kW	6,6
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	131,6
	Annual energy consumption	kWh	4054
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A++
SEER	LWT at 7°C		5,83
	LWT at 8°C		8,95
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B20
Compressor	Type		Twin rotary inverter compressor DC
Fan	Type		Brushless DC motor / BLDC
	Quantity		1
Refrigerant	Type/ GWP		R32 / 675
	Charged (<15m)	kg	1,65
		TCO <sub>2</sub> eq	
Pipe connections	Liquid / Gas		Φ9,52 (3/8") / Φ15,9 (5/8")
	Minimum installation length		2
	Maximum installation length		30
	Additional amount of refrigerant for over 15 linear meters		g/m
Maximum height difference	Outdoor unit above the indoor unit		20
	Outdoor unit below the indoor unit		20
Minimal wire pcs and dimension of cords*		pcs × mm²	3 × 4
Control cables: indoor unit to outdoor unit		pcs × mm²	2 × 0,75 (shielded cable)
Bracket spacing		(W×D)	656×456
Sound pressure level		dB(A)	46
Sound power level		dB(A)	59
Net dimensions	(W×D×H)	mm	1118×523×865
Gross dimensions	(W×D×H)	mm	1180×560×890
Net weight/Gross weight		kg	75/89
Operating outdoor temperature	Cooling		-5-43
	Heating		-25-35
	DHW		-25-43

1. Seasonal energy efficiency class measured under average climate conditions.

Notes:

DHW - Domestic hot water

LWT - Leaving water temperature


The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than IΔn: 30mA



































\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# Aquami Split heat pump

AQS100X1o<sup>[R14]</sup> / AQS100X13i<sup>[R14]</sup>



## Device features

							
Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 5,00	Operating range down to -25°C	Supply water temperature of 65°C	Integrated USB port for updates
							
Energy meter	Smart Grid functionality	Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance
							
Compact indoor split unit housing	Maximum installation length up to 30m	Silent mode	Built-in Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English
							
Multilanguage menu	Integrated temperature sensor	Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	DHW circulation pump operation schedules	Maximum leaving water temperature of 60°C (in DHW mode)
							
Prepared to create a cascade system	Modbus Protocol						

# Specification indoor unit

Model			AQS100X131 R14	
EAN Code			5905567602122	
Operation modes			Heating and cooling	
Leaving water temperature	Surface cooling	°C	5-25	
	Surface heating	°C	25-65	
	DHW (tank)	°C	30-60	
Power supply		V-Hz, Ø	220-240-50, 1f / 380-420-50, 3f	
Rated input		W	9095	
Operating current		A	13,5	
Sound power level		dB(A)	43	
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f / 380-420-50, 3f	
	Number of heating stages / Power	pcs. / kW	3 / 9 (3+3+3)	
	Maximum running current	A	13.3	
Net dimensions		(W×D×H) mm	420 × 270 × 790	
Gross dimensions		(W×D×H) mm	525 × 360 × 1050	
Net weight / Gross weight		kg	39 / 45	
Water circuit	Water connections		inch	R1" external
	Pressure relief valve		MPa	0.3
	Condensate drain		mm	Ø25
	Expansion tank	Total volume / Actual volume	l	8 / 4,8
		Maximum pressure / Initial pressure	MPa	0.3 / 0,1
	PHE / plate heat exchanger	Type	PHE / plate heat exchanger	
		Minimum flow	l/min	10
	Water pump head		m	9
	Water pump type		DC inverter	
Refrigerant circuit	Liquid / Gas	mm	Ø9,52 / Ø15,9	
Minimal wire pcs and dimension of cords*		pcs × mm²	5 × 2,5	
Control cables: indoor unit to outdoor unit		pcs × mm²	2 × 0.75 (shielded cable)	

# Specification outdoor unit

Minimum rated current of the overcurrent circuit breaker with breaker type			AQS100X1o R14	
EAN Code			5905567602078	
Power supply			220-240-50, 1f	
Heating (A7/W35)	Capacity	kW	10,00	
	Rated input	kW	2,00	
	COP		5,00	
Heating (A7/W45)	Capacity	kW	10,00	
	Rated input	kW	2,63	
	COP		3,80	
Heating (A7/W55)	Capacity	kW	9,50	
	Rated input	kW	3,06	
	COP		3,10	
Cooling (A35/W18)	Capacity	kW	10,00	
	Rated input	kW	2,08	
	EER		4,80	
Cooling (A35/W7)	Capacity	kW	8,20	
	Rated input	kW	2,48	
	EER		3,30	
Seasonal energy efficiency LWT 35°C	SCOP <sup>(1)</sup>		5,19	
	Rated heat output	kW	9,2	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	204,8	
	Annual energy consumption	kWh	3644	
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A+++	
Seasonal energy efficiency LWT 55°C	SCOP <sup>(1)</sup>		3,49	
	Rated heat output	kW	7,7	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	135,7	
	Annual energy consumption	kWh	4567	
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A++	
SEER	LWT at 7°C		5,98	
	LWT at 8°C		8,78	
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B20	
Compressor	Type		Twin rotary inverter compressor DC	
Fan	Type		Brushless DC motor / BLDC	
	Quantity		1	
Refrigerant	Type/ GWP		R32 / 675	
	Charged (<15m)	kg	1,65	
		TCO <sub>2</sub> eq		1,11
Pipe connections	Liquid / Gas		Φ9,52 (3/8") / Φ15,9 (5/8")	
	Minimum installation length		2	
	Maximum installation length		30	
	Additional amount of refrigerant for over 15 linear meters		g/m	38
Maximum height difference	Outdoor unit above the indoor unit		20	
	Outdoor unit below the indoor unit		20	
Minimal wire pcs and dimension of cords*		pcs × mm²	3 × 4	
Control cables: indoor unit to outdoor unit		pcs × mm²	2 × 0,75 (shielded cable)	
Bracket spacing		(W×D)	656×456	
Sound pressure level		dB(A)	49	
Sound power level		dB(A)	60	
Net dimensions	(W×D×H)	mm	1118×523×865	
Gross dimensions	(W×D×H)	mm	1180×560×890	
Net weight/Gross weight		kg	75/86	
Operating outdoor temperature	Cooling		°C	-5-43
	Heating		°C	-25-35
	DHW		°C	-25-43

1. Seasonal energy efficiency class measured under average climate conditions.

Notes:

DHW – Domestic hot water

LWT – Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than IΔn: 30mA

\*The above values apply to supply cables with a maximum length of 20m. If this value is exceeded, an electrical designer should be consulted.