

Wentilo ICON heat recovery unit IS330 E4



The **airCare+**
antibacterial
coating




Made in **Poland**




ASSEMBLY OPTION



Suspended



Hanging



Standing

Features



Effective
protection



Temperature
comfort



Surprisingly quiet
device



Healthy breathing



Higher energy
efficiency
standard



Control your unit
however and
wherever you want



Puristic
design



Moisture recovery
or removal



Low weight
and compact
dimensions



I am simple
for you



The power
of technology

Technologies



The **iNOFRAME**
technology
platform



iCARE air filtration
and purification



iENTHALPY
heat and moisture
recovery



iFLOW
airflow



Automatic
bypass **iDIRECT**



iHEAT anti-freeze
protection



iSENSOR
demand
control



iCLIMATE
climate adaptation
technology*



iCOMFORT
air cooling and
heating*



iLEAD
condensate
drain



iPURE filter
contamination
monitoring



iBALANCE airflow
balancing

Equipment



airENTHALPY
heat exchanger



Supply air filtration
G4 Coarse 75%



Supply air filtration
F7 ePM1 70%



Extract air filtration
M5 ePM10 55%



The **airCare+**
antibacterial
coating



airFLOW
fan



Automatic
bypass
airDIRECT



airHEAT
preheater



iEDGE SMART
control system




airCO₂
sensor



airRH
humidity
sensor

MyRotenso control options

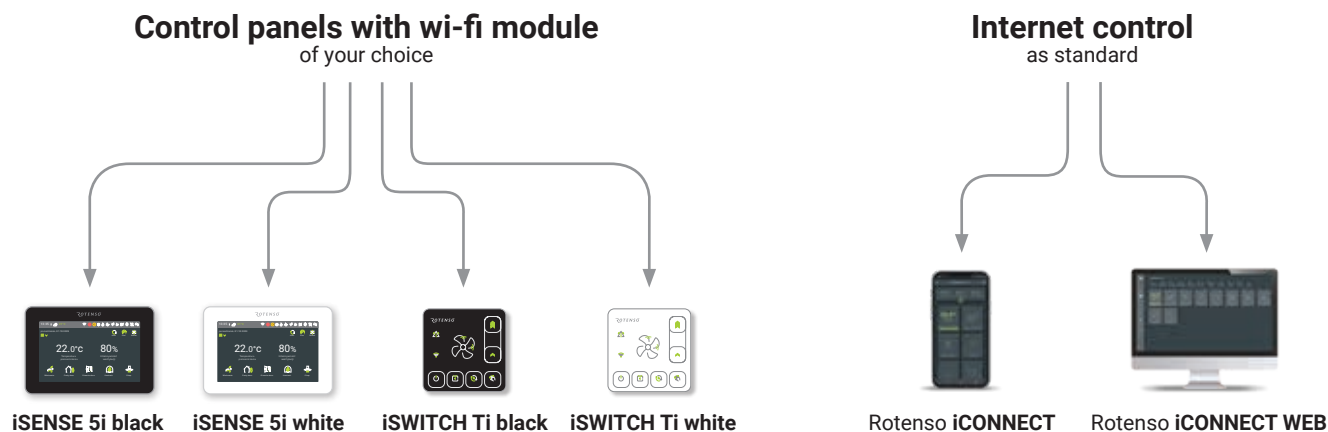


Technical specifications


Parameter		Wentilo ICON IS330 E4
Maximum flow rate	m³/h	330
External static pressure	Pa	100
Reference flow rate	m³/h	231
Minimum flow rate	m³/h	58
Maximum heat recovery efficiency	%	90
Heat recovery efficiency at reference flow rate	%	80
Sound power level	dB(A)	57
Energy efficiency class		A
Power input at reference flow rate	W	63
Filters	Supply air from outside the building	Anti-pollen filter iCARE G4 Coarse 75%
	Supply air from outside the building	Anti-smog filter iCARE F7 ePM1 70%
	Extract air from the room	Anti-pollen filter iCARE M5 ePM10 55%
Heat exchanger		Counterflow plate
Bypass		100% bypass
AEC (Annual Electricity Consumption) according to the with Commission Delegated Regulation (EU) No 1254/2014	kWh/a	190
AHS (Annual Heating Savings) according to the with Commission Delegated Regulation (EU) No 1254/2014	kWh/a	4486
Recommended dwelling area	m²	125 - 150
AEC for the recommended dwelling area	kWh/a	182 - 237
AHS for the recommended dwelling area	kWh/a	5696 - 6778
Electric power input of the fan drive at maximum flow rate	W	136
Preheater		As standard
Steady-state preheater power	W	1350
Temperature change at the preheater at maximum flow rate	°C	12
Power supply	V, Hz	230, 50
Rated current	A	7
Net dimensions	mm	1260 × 690 × 320
Gross dimensions	mm	1300 × 790 × 360
Net weight	kg	25
Gross weight	kg	28
Spigot diameter	mm	200
Condensate drain diameter	mm	20
Operating temperature range in the room	°C	5 - 45

IS execution sides

Standard (A)

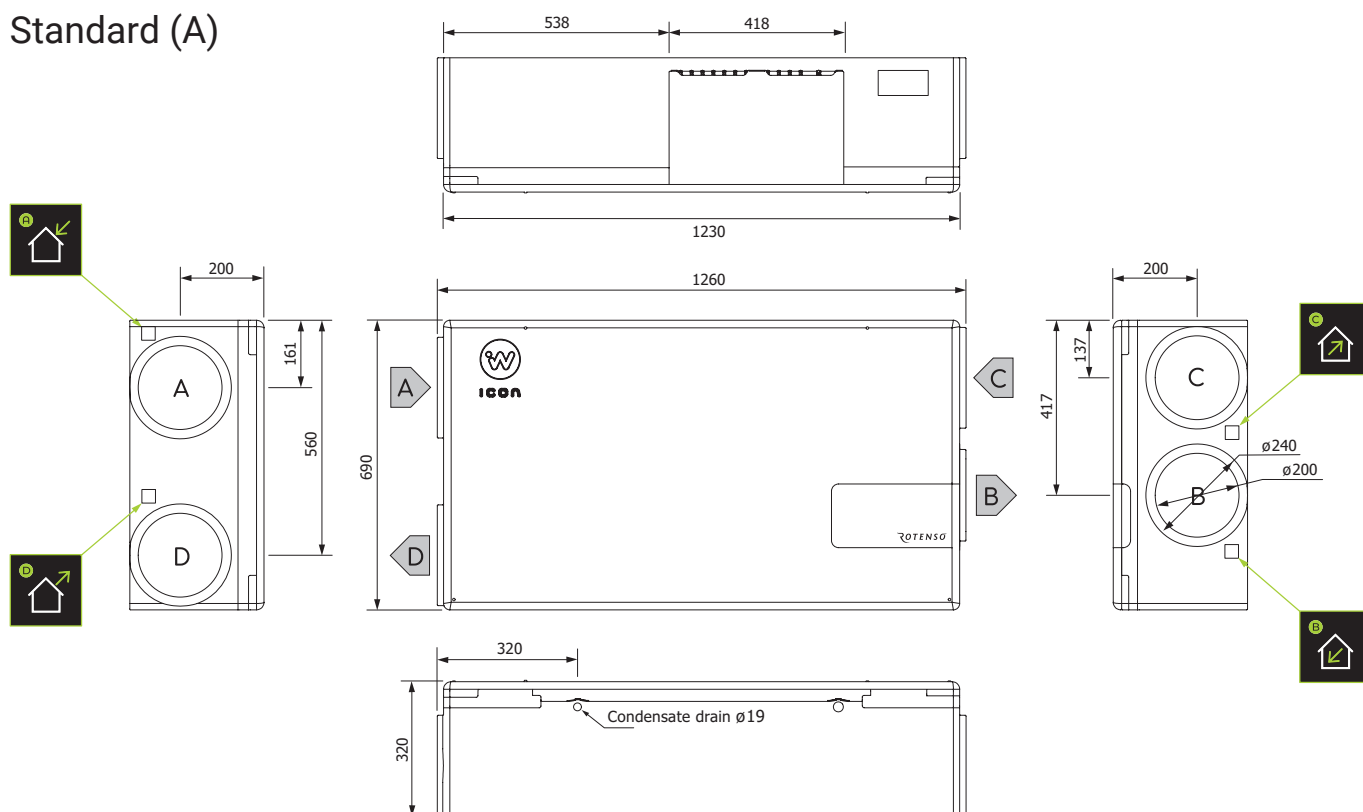


Alternative (B)

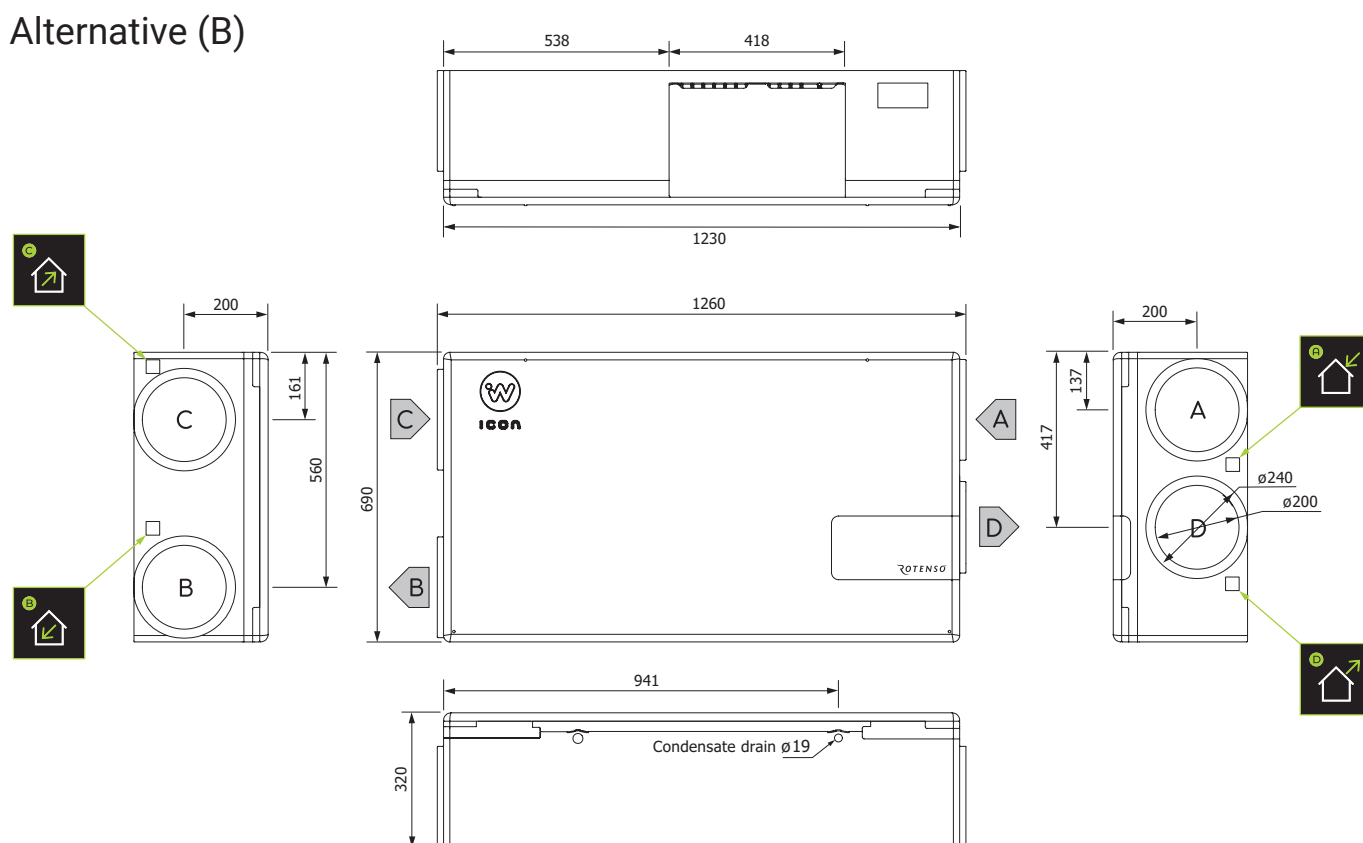


IS mounting options


For the standard execution side (A)

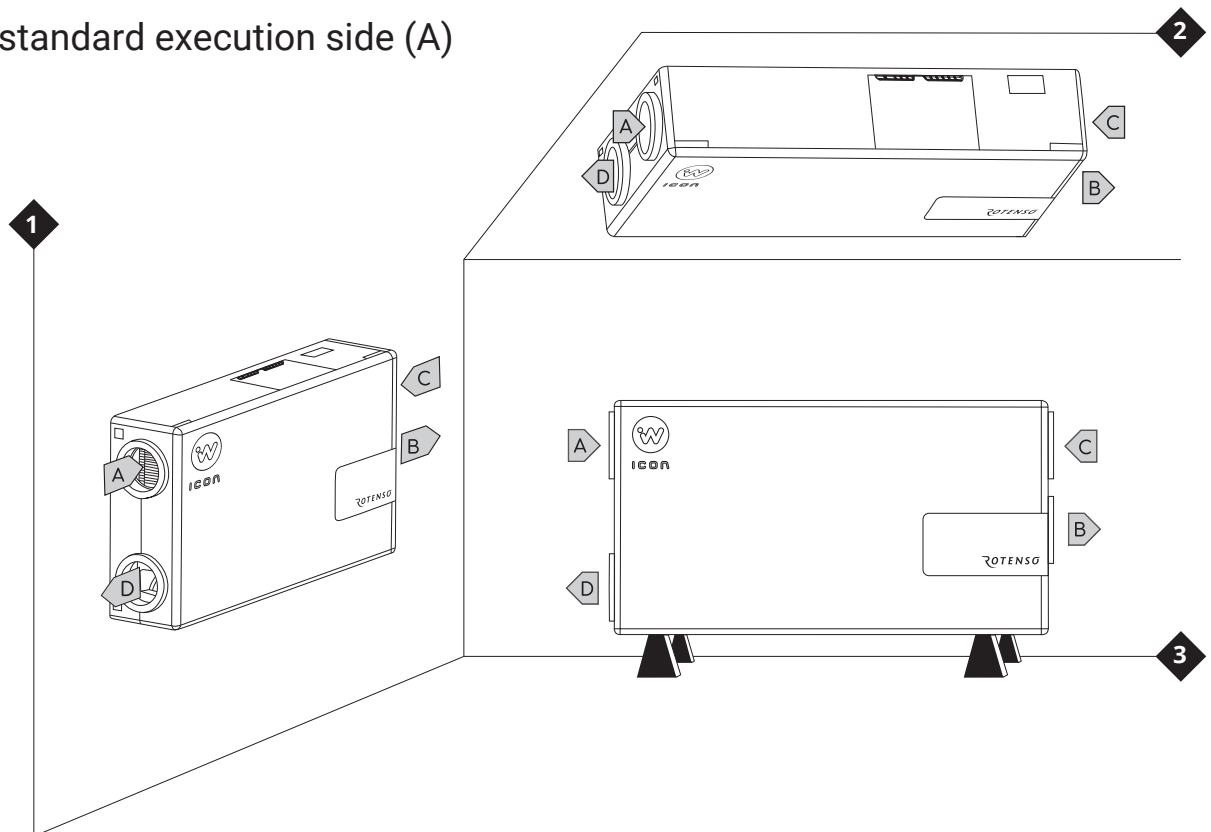


For alternative execution side (B)

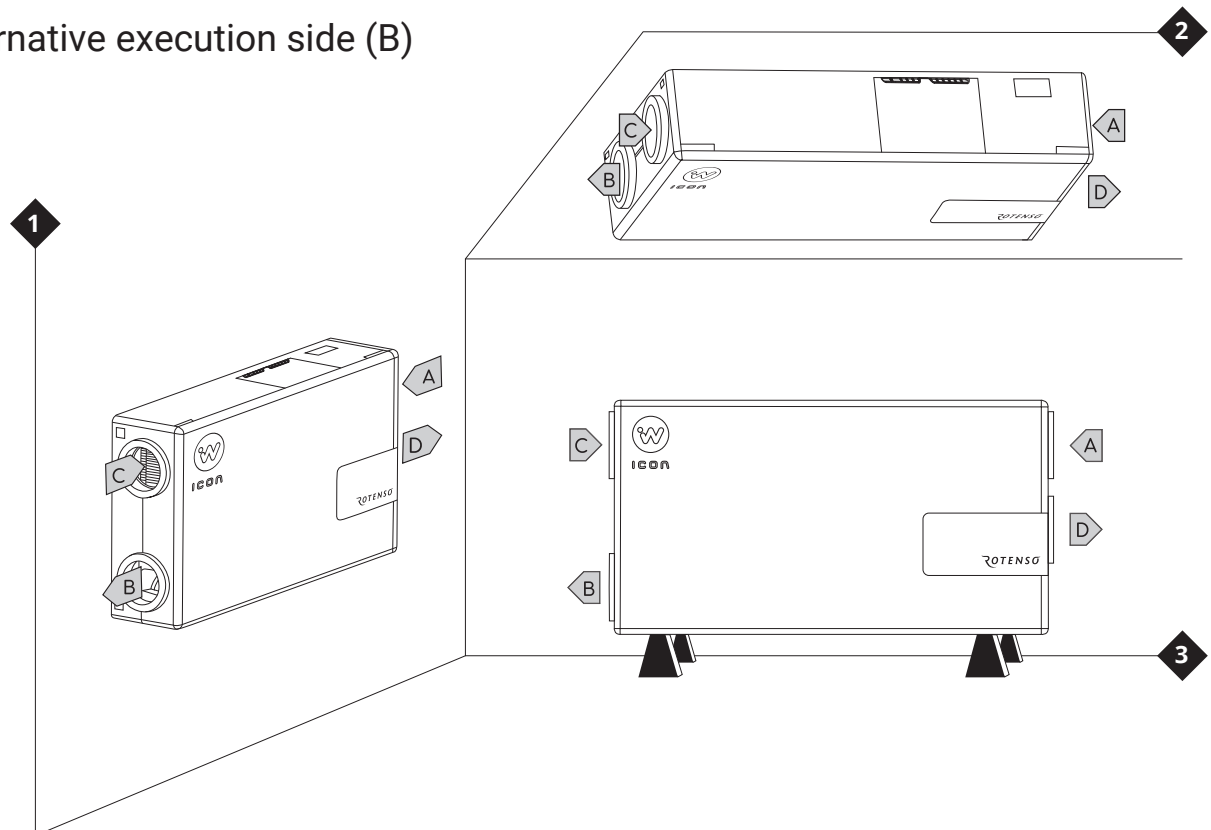

Heat recovery efficiency

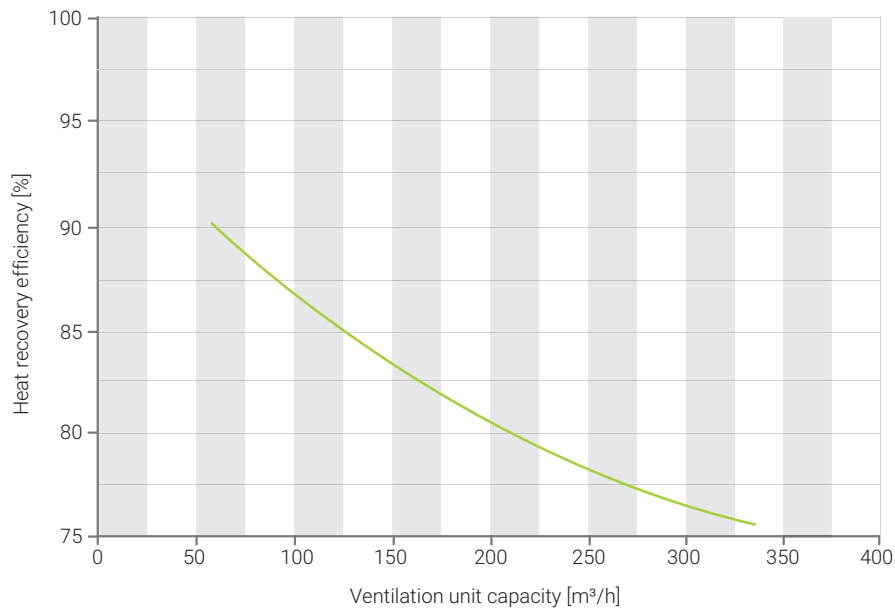


Flow characteristics

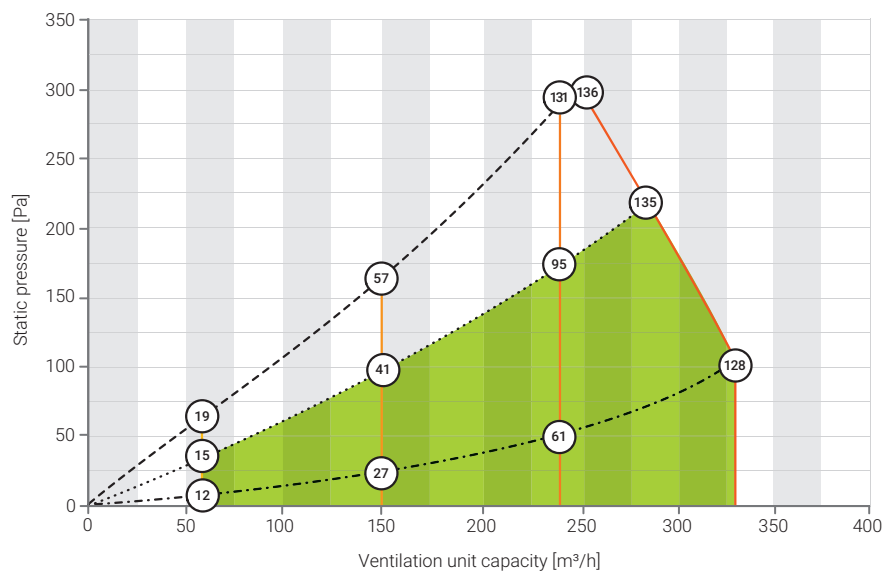

- Interaction curve for excessively dirty filters
- ... Interaction curve for dirty filters - to be replaced
- .- Interaction curve for clean filters
- Yellow line: Ventilation intensity - minimum
- Orange line: Ventilation intensity - for 1/3 capacity range
- Dark orange line: Ventilation intensity - for 2/3 capacity range
- Red line: Ventilation intensity - maximum
- Green shaded area: Recommended collaboration area
- Ⓘ Power consumption [W]

Acoustic characteristics

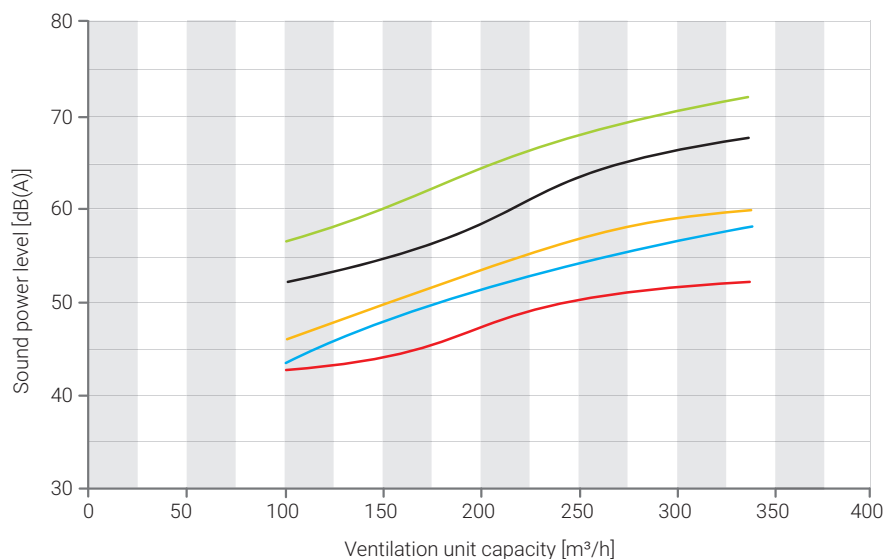

- Sound power level through the casing
- Sound power level at inlet air
- Sound power level at supply air
- Sound power level at exhaust air
- Sound power level at extract air

Accessories

	Product code	Trade name	IS330 E4
1.	RWA0102.00.0003.AW0	iSWITCH Ti WHITE control panel	•
2.	RWA0102.00.0003.AB0	iSWITCH Ti BLACK control panel	•
3.	RWA0102.00.0001.AW0	iSENSE 5i WHITE control panel	•
4.	RWA0102.00.0001.AB0	iSENSE 5i BLACK control panel	•
5.	RWA0501.00.0002.A00	iPIN IC/IS installation kit	•
6.	RWA0501.00.0001.A00	iFOOT installation kit	•
7.	RWA0103.00.0001.AS0	MULTI PROBE W2.2 wall mounted air quality sensor	• ¹
8.	RWA0103.IC.0001.AK0	MULTI PROBE D2.2 ICA duct mounted air quality sensor	• ³
9.	RWA0103.IS.0002.AK0	MULTI PROBE D2.2 ISB duct mounted air quality sensor	• ⁴
10.	RWA0103.IC.0003.AK0	RHT PROBE D2.2 ICA duct mounted humidity and temperature sensor	• ³
11.	RWA0103.IS.0004.AK0	RHT PROBE D2.2 ISB duct mounted humidity and temperature sensor	• ⁴
12.	RWA0103.00.0003.AK0	T PROBE D2.2 duct mounted temperature sensor	•
13.	RWA0201.00.0002.A00	iHEAT Cube E 160 1.8 electric duct heater	• ^{1,2}
14.	RWA0202.00.0001.A00	iMULTI Cube F 200 III DX duct heater-cooler	• ^{1,2}
15.	RWA0203.00.0001.A00	iMULTI Cube W 200 III water duct heater-cooler	• ^{1,2}
16.	RWA0204.00.0001.A00	Control valve VXP45.10-1.6 with actuator	• ¹
17.	I26Xo	IMOTO I26Xo condensing unit	
18.	I35Xo	IMOTO I35Xo condensing unit	• ¹
19.	RCU-AHUBOX-1C	RCU-AHUBOX-1C communication module	•
20.	RWA0601.00.0001.A00	iSTEAM duct humidifier	•
21.	RWA0101.00.0001.A00	iEDGE E 2.2 PCB module	•
22.	RWA0301.IS.0001.A00	airENERGY IS heat exchanger	•
23.	RWA0402.IS.0001.A00	iCARE ACTIVE IS carbon filter	•
24.	RWA0711.00.0005.A00	GWC iGROUND CUBE 200 damper	• ^{1,2}
25.	RWA0711.00.0006.A00	GWC iGROUND CUBE 250 damper	• ^{1,2}

¹ - iEDGE module E 2.2 required, ² - T PROBE D2.2 duct mounted temperature sensor required, ³ - for execution side A, ⁴ - for execution side B