


Wall-mounted air conditioner

Ukura U35X^[R15]

S-LINE

HP-LINE

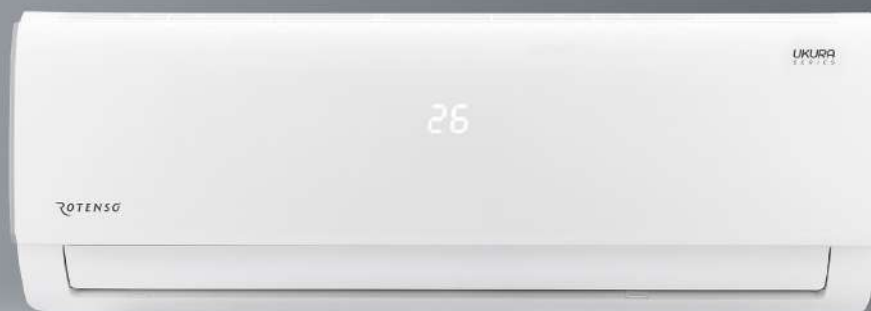

1:1
SINGLE

1:X
MULTI

Unit features

 Digital DC Inverter SKY®	 Automatic purification iAIR ⁽¹⁾	 Super Ionizer iAIR	 Cold Nano iAIR filter	 Antibacterial HEPA iAIR filter	 Electrostatic HD iAIR filter	 Super Silent eMOTO mode ⁽¹⁾	 Automatic 4D louvers
 Turbo eMOTO mode ⁽¹⁾	 Air supply eMOTO control system	 Wide-angle eMOTO air supply	 SMART Wi-Fi	 Wired controller SMART port ⁽²⁾	 SMART panel display ON/OFF	 SMART Follow mode	 Wireless remote control
 Wired controller ⁽²⁾	 SMART heating to 8°C ⁽¹⁾	 Louvre setting memory	 1W standby mode ⁽¹⁾	 Auto restart memory	 Anti-corrosive gold fins	 Silence mode	 Timer
 Heating at low outdoor temp. down to -20°C	 Cooling at low outdoor temp. down to -15°C	 Double-sided condensate drainage	 Self-diagnostics	 Sleep mode			

Technical specification



Model				Ukura 3,5 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	3517 (1114-3927)
Rated input		Nom. (Min. - Max.)	W	1320 (83-1600)
Operating current		Nom. (Min. - Max.)	A	5,7 (0,4-7)
Capacity	Heating	Nom. (Min. - Max.)	W	3810 (1084-4162)
Rated input		Nom. (Min. - Max.)	W	1190 (167-1400)
Operating current		Nom. (Min. - Max.)	A	5,2 (0,7-6,1)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	3,5
SEER			W/W	6,5
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	188
Design load in heating mode (Tbiv -7°C)			kW	2,8
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	958
Dehumidification			l/h	1,2
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U35Xi R15
EAN product code				5905567606335
Fan speed	H / M / L / S		rpm	1130 / 950 / 750 / 590
Air flow	H / M / L / S		m³/h	530 / 480 / 430 / 310
Sound pressure level	H / M / L / S		dB(A)	39,5 / 35,5 / 25 / 21,5
Sound power level			dB(A)	54
Rated input			W	35
Operating current			A	0,2
Net dimensions	W × D × H		mm	805 × 194 × 285
Gross dimensions	W × D × H		mm	870 × 270 × 365
Net weight / Gross weight			kg	7,6 / 9,8
Condensate drain			mm	16
Outdoor unit				U35Xo R15
EAN product code				5905567606342
Fan speed	H / M / L		rpm	780 / 700 / 600
Maximum air flow			m³/h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	64
Net dimensions	W × D × H		mm	720 × 270 × 495
Gross dimensions	W × D × H		mm	835 × 300 × 540
Bracket spacing	W × D		(mm)	452 × 255
Net weight / Gross weight			kg	23,2 / 25,0
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,52
		TCO ₂ eq		0,35
	Charged (> 5m)	g/mb		12
Pipe connections	Liquid/Gas	mm (inches)		Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	17~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -20~30
Compatible systems				
1:1 SINGLE				●
1:2 DUAL				
1:X MULTI S-Line				●
1:X MULTI N-Line				
1:X MULTI HP-Line				●

T - Turbo; H - High; M - Medium; L - Low; S - Silent;

Wall-mounted air conditioner

Ukura H U35Xi^[R15] / UH35Xo^[R15]

S-LINE

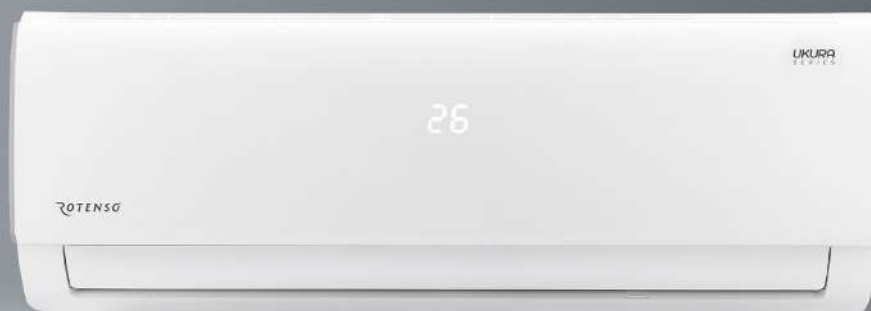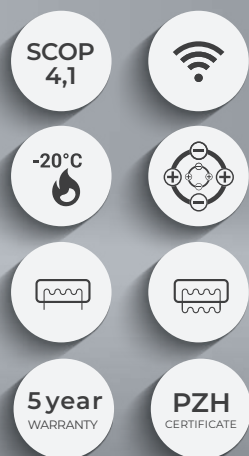

1:1
SINGLE

Unit features

Digital DC Inverter SKY®	Automatic purification iAIR ⁽¹⁾	Super Ionizer iAIR	Cold Nano iAIR filter	Antibacterial HEPA iAIR filter	Electrostatic HD iAIR filter	Super Silent eMOTO mode ⁽¹⁾	Automatic 4D louvers
Turbo eMOTO mode ⁽¹⁾	Air supply eMOTO control system	Wide-angle eMOTO air supply	SMART Wi-Fi	Wired controller SMART port ⁽²⁾	SMART panel display ON/OFF	SMART Follow mode	Wireless remote control
Wired controller ⁽²⁾	SMART heating to 8°C ⁽¹⁾	Louvre setting memory	1W standby mode ⁽¹⁾	Auto restart memory	Anti-corrosive gold fins	Drip tray heater	Compressor crankcase heater
Silence mode	Timer	Heating at low outdoor temp. down to -20°C	Cooling at low outdoor temp. down to -15°C	Double-sided condensate drainage	Self-diagnostics	Sleep mode	

Technical specification

Model				Ukura H 3,5 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	3517 (1114-3927)
Rated input		Nom. (Min. - Max.)	W	1320 (83-1600)
Operating current		Nom. (Min. - Max.)	A	5,7 (0,4-7)
Capacity	Heating	Nom. (Min. - Max.)	W	3810 (1084-4162)
Rated input		Nom. (Min. - Max.)	W	1190 (167-1400)
Operating current		Nom. (Min. - Max.)	A	5,2 (0,7-6,1)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	3,5
SEER			W/W	6,5
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	188
Design load in heating mode (Tbiv -7°C)			kW	2,8
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	958
Dehumidification			l/h	1,2
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U35Xi R15
EAN product code				5905567606335
Fan speed	H / M / L / S		rpm	1130 / 950 / 750 / 590
Air flow	H / M / L / S		m³/h	530 / 480 / 430 / 310
Sound pressure level	H / M / L / S		dB(A)	39,5 / 35,5 / 25 / 21,5
Sound power level			dB(A)	54
Rated input			W	35
Operating current			A	0,2
Net dimensions	W × D × H		mm	805 × 194 × 285
Gross dimensions	W × D × H		mm	870 × 270 × 365
Net weight / Gross weight			kg	7,6 / 9,8
Condensate drain			mm	16
Outdoor unit				UH35Xo R15
EAN product code				5905567606359
Fan speed	H / M / L		rpm	780 / 700 / 600
Maximum air flow			m³/h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	64
Net dimensions	W × D × H		mm	720 × 270 × 495
Gross dimensions	W × D × H		mm	835 × 300 × 540
Bracket spacing	W × D		(mm)	452 × 255
Net weight / Gross weight			kg	23,2 / 25,0
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,52
		TCO ₂ eq		0,35
	Charged (> 5m)		g/mb	12
Pipe connections	Liquid/Gas		mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	17~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -20~30
Compatible systems				
1:1 SINGLE				●
1:2 DUAL				
1:X MULTI S-Line				
1:X MULTI N-Line				
1:X MULTI HP-Line				

T - Turbo; H - High; M - Medium; L - Low; S - Silent;