


Wall-mounted air conditioner

Ukura U70X ^[R15]

S-LINE

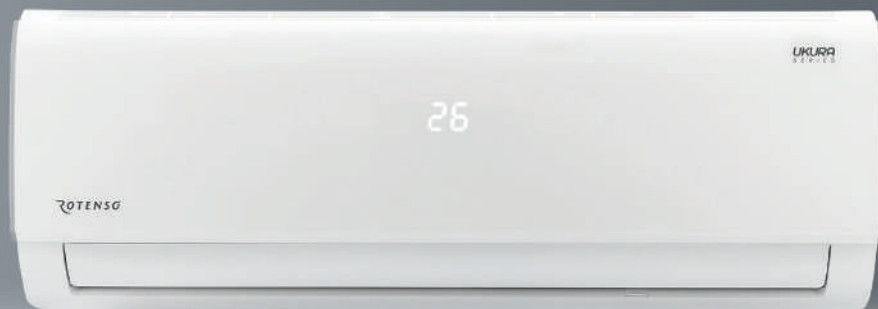

Unit features

Digital DC Inverter SKY®	Automatic purification iAIR ⁽¹⁾	Super Ionizer iAIR	Cold Nano iAIR filter	Antibacterial HEPA iAIR filter	Electrostatic HD iAIR filter	Super Silent eMOTO mode ⁽¹⁾	Automatic 4D louvers
Turbo eMOTO mode ⁽¹⁾	Air supply eMOTO control system	Wide-angle eMOTO air supply	SMART Wi-Fi	Wired controller SMART port ⁽²⁾	SMART panel display ON/OFF	SMART Follow mode	Wireless remote control
Wired controller ⁽²⁾	SMART heating to 8°C ⁽¹⁾	Louvre setting memory	1W standby mode ⁽¹⁾	Auto restart memory	Anti-corrosive gold fins	Silence mode	Timer
Heating at low outdoor temp. down to -20°C	Cooling at low outdoor temp. down to -15°C	Double-sided condensate drainage	Self-diagnostics	Sleep mode			

Technical specification

Model				Ukura 7,0 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	7034 (2081-7913)
Rated input		Nom. (Min. - Max.)	W	2600 (420-3150)
Operating current		Nom. (Min. - Max.)	A	11,3 (1,8-13,7)
Capacity	Heating	Nom. (Min. - Max.)	W	7327 (1612-7913)
Rated input		Nom. (Min. - Max.)	W	2400 (300-2750)
Operating current		Nom. (Min. - Max.)	A	10,4 (1,3-12,0)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	7,0
SEER			W/W	6,1
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	402
Design load in heating mode (Tbiv -7°C)			kW	4,8
SCOP			W/W	4,0
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	1682
Dehumidification			l/h	2,4
Maximum energy consumption			W	3500
Maximum operating current			A	15,2
Indoor unit				U70Xi R15
EAN product code				5905567606397
Fan speed	H / M / L / S		rpm	1130 / 900 / 800 / 710
Air flow	H / M / L / S		m³/h	980 / 899 / 817 / 662
Sound pressure level	H / M / L / S		dB(A)	45 / 40,5 / 36 / 29,5
Sound power level			dB(A)	60
Rated input			W	58
Operating current			A	0,3
Net dimensions	W × D × H		mm	1040 × 220 × 327
Gross dimensions	W × D × H		mm	1120 × 405 × 315
Net weight / Gross weight			kg	12,3 / 15,8
Condensate drain			mm	16
Outdoor unit				U70Xo R15
EAN product code				5905567606403
Fan speed	H / M / L		rpm	830 / 700 / 550
Maximum air flow			m³/h	3500
Sound pressure level			dB(A)	59
Sound power level			dB(A)	67
Net dimensions	W × D × H		mm	890 × 342 × 673
Gross dimensions	W × D × H		mm	995 × 398 × 740
Bracket spacing	W × D		(mm)	663 × 348
Net weight / Gross weight			kg	42,9 / 45,9
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		1,42
		TCO ₂ eq		0,96
	Charged (> 5m)		g/mb	24
Pipe connections	Liquid/Gas	mm (inches)		Φ9,52 / Φ15,9 (3/8" / 5/8")
Maximum installation length			m	50
Maximum height difference			m	25
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C16
Power cables: outdoor unit			pcs × mm²	3 × 2,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 2,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	17~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -20~30
Compatible systems				
1:1 SINGLE				●
1:2 DUAL				
1:X MULTI S-Line				●
1:X MULTI N-Line				
1:X MULTI HP-Line				

T - Turbo; H - High; M - Medium; L - Low; S - Silent;