



Wall-mounted air conditioner

Versu Cloth Caramel VCC26X ^[R15]

S-LINE

HP-LINE

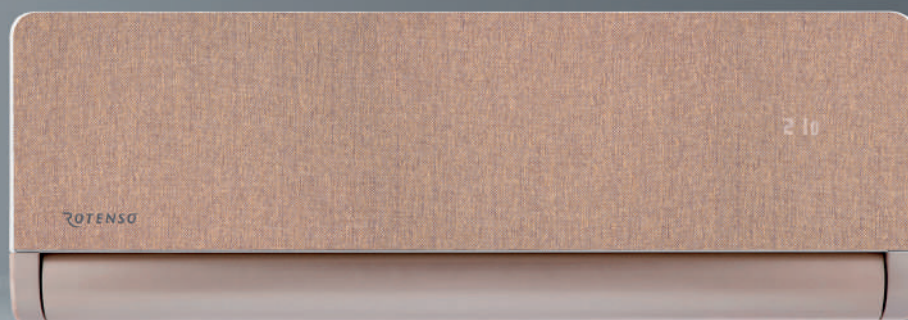

Unit features

Digital DC Inverter SKY [®]	Textile changeable front panel	Automatic purification iClean ⁽¹⁾	Super Ionizer iAIR	3-in-1 (Si, Ion + Photocat. + Nano) iAIR filter ⁽¹⁾	Antibacterial HEPA iAIR filter	Electrostatic HD iAIR filter	Super Silent eMOTO mode ⁽¹⁾
Automatic 4D louvers	Rotating louvre 180°	Turbo eMOTO mode ⁽¹⁾	Upwards cascade air supply	Downwards cascade air supply	Air supply eMOTO control system	Eco eMOTO mode ⁽¹⁾	Wide-angle eMOTO air supply
Humidity sensor ⁽¹⁾⁽³⁾	SMART Wi-Fi	Wired controller SMART port ⁽²⁾	SMART panel display ON/OFF	SMART Follow mode	Wireless remote control	Wired controller ⁽²⁾	SMART heating to 8°C ⁽¹⁾
Louvre setting memory	1W standby mode ⁽¹⁾	Auto restart memory	Anti-corrosive gold fins	Drip tray heater	Compressor crankcase heater	Silence mode	Timer
Cooling at low outdoor temp. down to -15°C	Heating at low outdoor temp. down to -22°C ⁽¹⁾	Double-sided condensate drainage	Self-diagnostics	Sleep mode	BMS Modbus ⁽²⁾	BMS Bacnet ⁽²⁾	

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

* Silver Ion + Photocatalytic + Cold Nano

Technical specification

Model				Versu Cloth Caramel 2,6 kW	
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)	
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)	
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)	
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)	
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)	
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)	
Reversible heat pump type				air-to-air	
Design load in cooling mode			kW	2,6	
SEER			W/W	8,8	
Energy efficiency class, cooling				A+++	
Annual electric energy consumption, cooling			kWh/a	103	
Design load in heating mode (Tbiv -7°C)			kW	2,5	
SCOP			W/W	4,6	
Energy efficiency class, heating				A++	
Annual electric energy consumption, heating			kWh/a	776	
Dehumidification			l/h	1,0	
Maximum energy consumption			W	2200	
Maximum operating current			A	9,6	
Indoor unit				VCC26Xi R15	
EAN product code				5905567601019	
Fan speed		T / H / M / L / ML / S	rpm	1122 / 910 / 823 / 710 / 652 / 600	
Air flow		T / H / M / L / ML / S	m³/h	700 / 555 / 445 / 380 / 270 / 230	
Sound pressure level		T / H / M / L / ML / S	dB(A)	40 / 32 / 27 / 24 / 21 / 19	
Sound power level			dB(A)	53	
Rated input			W	13	
Operating current			A	0,1	
Net dimensions		W × D × H	mm	920 × 211 × 321	
Gross dimensions		W × D × H	mm	1005 × 295 × 385	
Net weight / Gross weight			kg	11,3 / 14,2	
Condensate drain			mm	16	
Outdoor unit				VO26Xo R15	
EAN product code				5905567606649	
Fan speed		H / M / L	rpm	800 / 620 / 450	
Maximum air flow			m³/h	2200	
Sound pressure level			dB(A)	53	
Sound power level			dB(A)	58	
Net dimensions		W × D × H	mm	765 × 303 × 555	
Gross dimensions		W × D × H	mm	887 × 337 × 610	
Bracket spacing		W × D	(mm)	452 × 286	
Net weight / Gross weight			kg	26,4 / 28,8	
Refrigerant	Type			R32	
	GWP			675	
	≤ 5m	kg		0,7	
		TCO ₂ eq		0,47	
	Charged > 5m	g/mb		12	
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	
Maximum installation length			m	25	
Maximum height difference			m	10	
Compressor type				Rotary DC	
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f	
Electrical protection			A	C10	
Power cables: outdoor unit			pcs × mm²	3 × 1,5	
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5	
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5	
Indoor operating range (cooling / heating)			°C	16-32 / 0-30	
Outdoor operating range (cooling / heating)			°C	-15-50 / -22-30	
Compatible systems					
1:1 SINGLE				●	
1:2 DUAL					
1:X MULTI S-Line				●	
1:X MULTI N-Line					
1:X MULTI HP-Line				●	

T - Turbo; H - High; M - Medium; L - Low; ML - Medium-Low; S - Silent;