



Wall-mounted air conditioner

Versu Pure VP50X^[R15]

S-LINE

HP-LINE

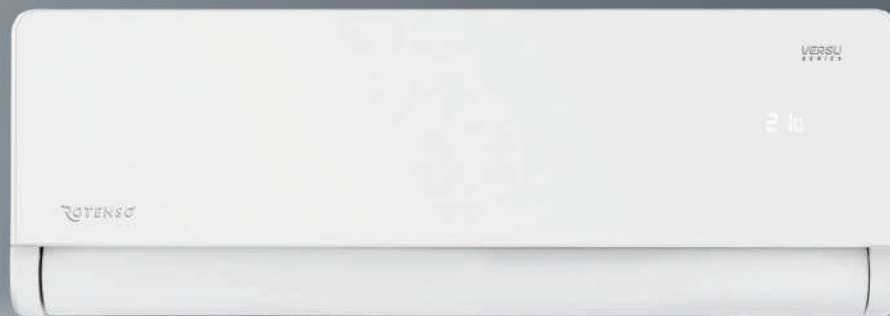

Unit features



Digital DC Inverter SKY[®]



Automatic purification iClean⁽¹⁾



Super Ionizer iAIR



3-in-1 (Si.Ion + Photocat. + Nano) iAIR filter⁽¹⁾



Antibacterial HEPA iAIR filter



Electrostatic HD iAIR filter



Super Silent eMOTO mode⁽¹⁾



Automatic 4D louvres



Rotating louvre 180°



Turbo eMOTO mode⁽¹⁾



Upwards cascade air supply



Downwards cascade air supply



Air supply eMOTO control system



Eco eMOTO mode⁽¹⁾



Wide-angle eMOTO air supply



Humidity sensor⁽¹⁾⁽³⁾



Wired controller SMART port⁽²⁾



SMART Wi-Fi



SMART panel display ON/OFF



SMART Follow mode



Wireless remote control




Wired controller⁽²⁾



SMART heating to 8°C⁽¹⁾



Louvre setting memory



1W standby mode⁽¹⁾



Auto restart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -22°C⁽¹⁾



Double-sided condensate drainage



Self-diagnostics



Sleep mode



BMS Modbus⁽²⁾



BMS Bacnet⁽²⁾

Technical specification

Model				Versu Pure 5,3 kW	
Capacity	Cooling	Nom. (Min. - Max.)	W	5275 (1817-6008)	
Rated input		Nom. (Min. - Max.)	W	1600 (140-2300)	
Operating current		Nom. (Min. - Max.)	A	7,0 (0,6-10,0)	
Capacity	Heating	Nom. (Min. - Max.)	W	5568 (1260-6154)	
Rated input		Nom. (Min. - Max.)	W	1680 (220-2350)	
Operating current		Nom. (Min. - Max.)	A	7,3 (1,0-10,2)	
Reversible heat pump type				air-to-air	
Design load in cooling mode			kW	5,3	
SEER			W/W	6,3	
Energy efficiency class, cooling				A++	
Annual electric energy consumption, cooling			kWh/a	294	
Design load in heating mode (Tbiv -7°C)			kW	4,1	
SCOP			W/W	4,1	
Energy efficiency class, heating				A+	
Annual electric energy consumption, heating			kWh/a	1430	
Dehumidification			l/h	1,8	
Maximum energy consumption			W	2500	
Maximum operating current			A	10,9	
Indoor unit				VP50Xi R15	
EAN product code				5905567600999	
Fan speed	T / H / M / L / ML / S	rpm	1150 / 970 / 880 / 800 / 760 / 670		
Air flow	T / H / M / L / ML / S	m³/h	750 / 590 / 490 / 410 / 330 / 280		
Sound pressure level	T / H / M / L / ML / S	dB(A)	41 / 36 / 30 / 28 / 24 / 19		
Sound power level		dB(A)	54		
Rated input		W	34		
Operating current		A	0,1		
Net dimensions	W × D × H	mm	920 × 211 × 321		
Gross dimensions	W × D × H	mm	1005 × 295 × 385		
Net weight / Gross weight		kg	11,5 / 14,4		
Condensate drain		mm	16		
Outdoor unit				VP50Xo R15	
EAN product code				5905567601002	
Fan speed	H / M / L	rpm	760 / 650 / 490		
Maximum air flow		m³/h	2100		
Sound pressure level		dB(A)	54		
Sound power level		dB(A)	63		
Net dimensions	W × D × H	mm	805 × 330 × 554		
Gross dimensions	W × D × H	mm	915 × 370 × 615		
Bracket spacing	W × D	(mm)	511 × 317		
Net weight / Gross weight		kg	33,5 / 36,1		
Refrigerant	Type		R32		
	GWP		675		
	≤ 5m	kg	1,1		
		TCO ₂ eq	0,74		
	Charged > 5m	g/mb	12		
Pipe connections	Liquid/Gas	mm (inches)	Φ6,35 / Φ12,7 (1/4" / 1/2")		
Maximum installation length		m	30		
Maximum height difference		m	20		
Compressor type				Rotary DC	
Type of outdoor unit power supply		V-Hz, Ø	220-240-50, 1f		
Electrical protection		A	C16		
Power cables: outdoor unit		pcs × mm²	3 × 2,5		
Control and power cables: indoor unit - outdoor unit		pcs × mm²	5 × 2,5		
Control and power cables: hiro unit - indoor unit		pcs × mm²	4 × 1,5		
Indoor operating range (cooling / heating)		°C	16-32 / 0-30		
Outdoor operating range (cooling / heating)		°C	-15-50 / -22-30		
Compatible systems					
1:1 SINGLE				●	
1:2 DUAL					
1:X MULTI S-Line				●	
1:X MULTI N-Line					
1:X MULTI HP-Line				●	

T - Turbo; H - High; M - Medium; L - Low; ML - Medium-Low; S - Silent;